




















Ploče sa šupljim komorama iz PC (HKS)

Ugradni formati

Snaga mm	Struktura	Težina cca. kg/m ²	K-vrijednost W/m ² K	Transmisija u % max.		Požarno vladanje prema sprovedenom ocjenjivanju	Varijable proizvodne širine sa zatvorenim bočnim stranicama	Standardne širine u mm
				kristal	opal			
4	2-sloja 	0,83	4,00	83	70	B 1	500 - 1070	1050 + 2100
4,5	2-sloja 	1,00	3,90	83	70	B 1	500 - 1070	1050 + 2100
6	2-sloja 	1,30	3,60	82	64	B 1	550 - 1270	1050 + 2100
8	2-sloja 	1,50	3,30	81	62	B 1	550 - 1270	1050 + 2100
8	4-sloja 	1,70	2,60	77	54	B 1	550 - 1270	1050
10	2-sloja 	1,70	3,20	80	60	B 1	550 - 1270 1300 - 2100	1050
10	4-sloja 	1,90	2,50	76	50	B 1	550 - 1270 1) 2)	1050 + 1250
16	2-sloja 	2,40	2,80	79	63	B 1	600 - 1270	980 + 1200
20	2-sloja 	2,80	2,60	77	61	B 2	1) 2) 3) 4)	
16	M-struktura 	2,70	2,10	70	47	B 1	600 - 1270	980 + 1200
20	M-struktura 	3,00	1,90	68	45	B 1		
16	5-sloja 	2,80	1,80	69	46	B 1	HI 600 - 1270 1) 2)	980 + 1200
20	5-sloja 	3,10	1,70	67	45	B 2		
25	6-sloja 	3,40	1,45	62	44	B 2 B 1 moguće	700 - 1270 1)	980 + 1200
32	6-sloja 	3,60	1,35	61	43	B 2		980 + 1230
25	X5 	3,50	1,50	59	42	u ispitivanju	730 - 1250	980 + 1230
32	X5 	3,70	1,40	57	40			

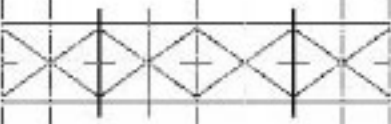1) dizajn s posebnim bojama i površinom HEATBLOC

2) te BICOLOR - dizajn

B 1 teško zapaljivo -također negorivo otpaljivanje
Molimo zatražite daljnje tehničke pojedinosti i informacijeHI = neograničena garancija od tuće
ali pripaziti na najmanju dostatnu količinu. Molimo pošaljite upit.